

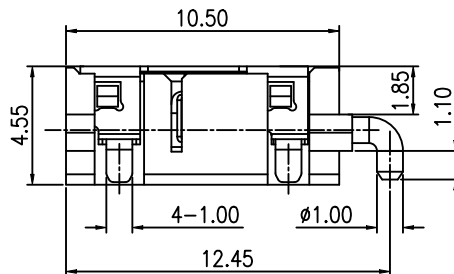




REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

SPECIFICATIONS:


1. ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 24V 3A
 - 1-2. CONTACT RESISTANCE: 30mΩ MAX. (INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 0.3~3.0 KGF
 - 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF
3. LIFE TEST: 5,000 CYCLES MIN.
4. FOR REFLOW SOLDERING LEAD-FREE PROCESS.

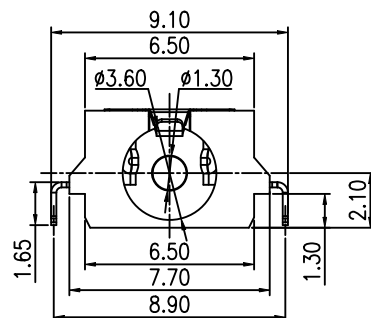

3D VIEW

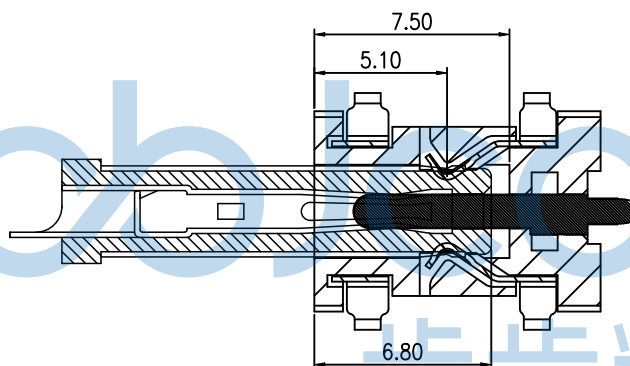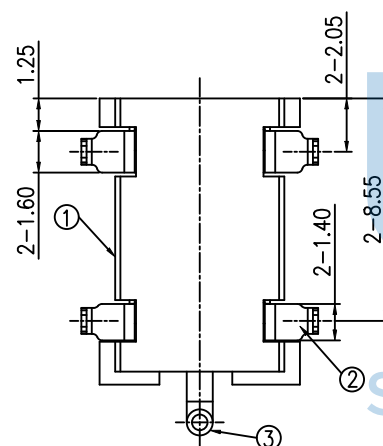


DC JACK INSERT DEPTH

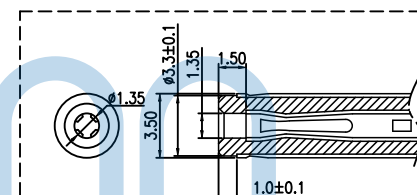

 #1 PIN(+)
 #2 TIP SPRING(-)

ELECTRICAL CIRCUIT

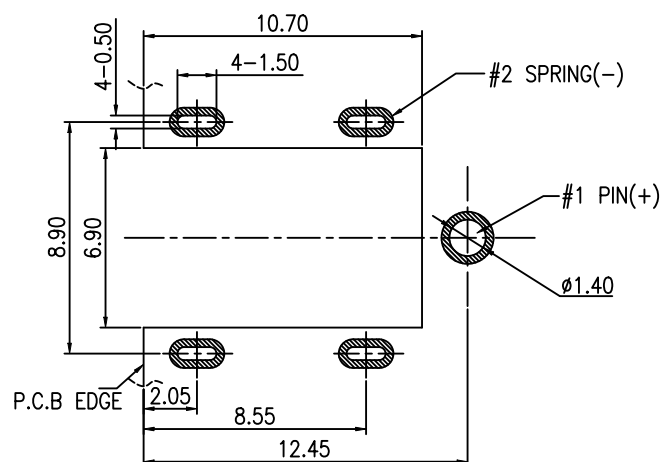

RECOMMENDED PCB LAYOUT
TOP VIEW (TOLERANCE:±0.05)



3	CENTER PIN	1	BRASS;THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	
2	SHELL	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.2
1	HOUSING	1	PA9T;COLOR BLACK	
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0076-1

步步精科技有限公司

NAME:	DC插座 1.3针 沉板1.3 全铜 平口 四脚插 全金 DCJR0006-F02G1BR-A
-------	--

	PJ. NO.: DC.03.45-11-B001
---	---------------------------

	SIZE: A4	DRW NO.:

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------


SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1 / 2
------------	----------	----------	-------------

1载带=1000PCS

1外箱=1000PCSX10盘载带=10000PCS



载带引出方向
* 载带包装时请依此引出方向为标准

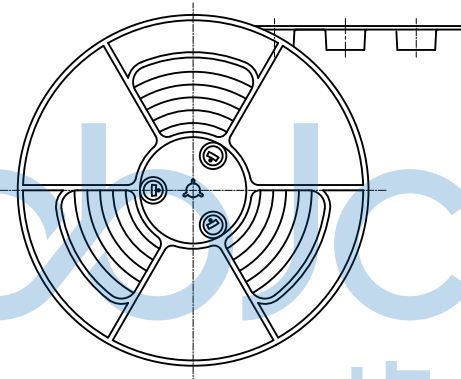

卷盘包装示意

DCJR0006 系列

载盘

标签一

DCJR0005 载带图纸

三角板
共4块

干燥剂

薄膜袋 (HDPE)

标签二

纸箱

包材名称	材料及厚度 (mm)	规格 (mm)
DCJR0005 载带	P.S (白色透明) T=0.30	12500X24.00X4.90
载盘	HI P.S (蓝色)	ø330X24
自粘带	PET (白色透明)	W=21.30 T=0.06
PE-375X450X0.06-A	PE (白色透明)	770X750X0.035
三角板	A=A+	260X300
ZK-350X350X320-A	K=K	350X350X320

备注:

1. 每箱内必须放干燥剂;
2. 每箱内必须用PE带密封包装;
3. 参考《高温材料管理规定》进行作业;
4. 我司标准格式标签或标签按客户要求制作;



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG,NO:	0076-1	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	.X': ±3' .X'': ±2' .X'X': ±1'
APPD.	JM_Zheng	NAME: DC插座 1.3针 沉板1.3 全铜 平口 四脚插 全金 DCJR0006-F02G1BR-A	
CHKD.	LYX	PJ. NO.: DC.03.45-11-B001	
DR.	TSP	SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	

