

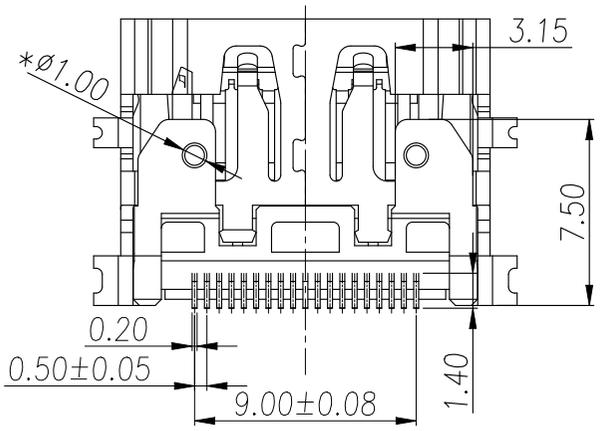
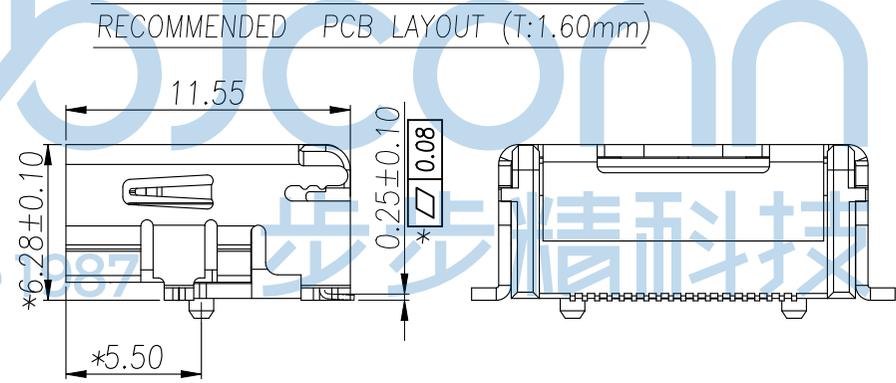
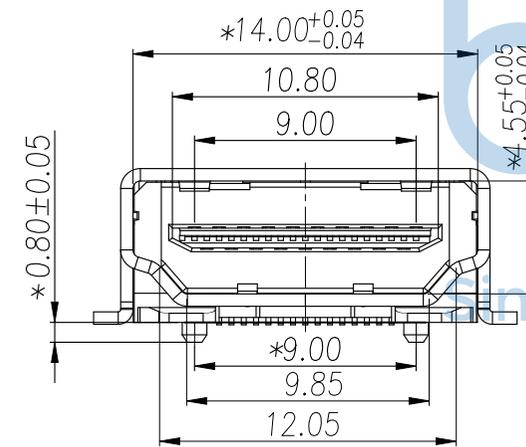






REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

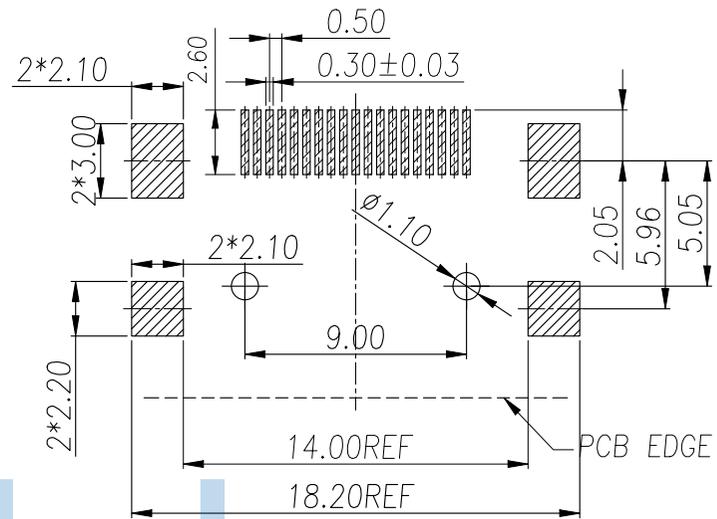

- 备注:
- 1) 材质:
 - 1-1 本体:LCP 94V-0 黑色
 - 1-2 端子:C2680 T=0.20mm
 - 1-3 铜壳:C2680或SPCC T=0.50mm
 - 2) 镀层:
 - 2-1 端子:所有面电镀, 接点镀金(参照料号编码), 焊脚镀锡100u",
 - 2-2 外壳:镀金或镍
 - 3) 技术规格
 - 3-1 额定电压:40V
 - 3-2 额定电流:0.5A
 - 3-3 绝缘电阻:100兆欧最小
 - 3-4 接触电阻:30毫欧最大
 - 3-5 操作温度:-20度到85度
 - 3-6 插入力:44.1牛最大
 - 3-7 拔出力:9.8牛最小, 44.1牛最大
 - 3-8 耐久:10000次
 - 4) 标"*"的QC重点标制尺寸

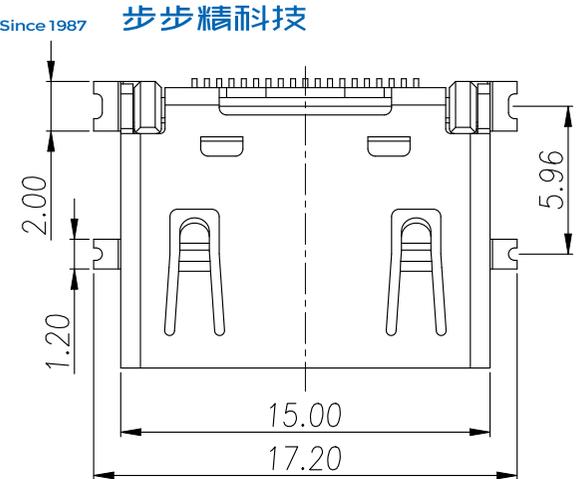

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' .X': ±2' .XX': ±1'	
APPD.	JM_Zheng	NAME: HDMI 19P 母座 四脚贴片 带柱1.0 柱高0.80 L=11.55 H=6.28 端子SMT 平口 铁壳	
CHKD.	LYX	PJ. NO.: 124-221-190001-T1G	
DR.	TSP	SIZE: A4 DRW NO.:	
PDWG.NO: 0006-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

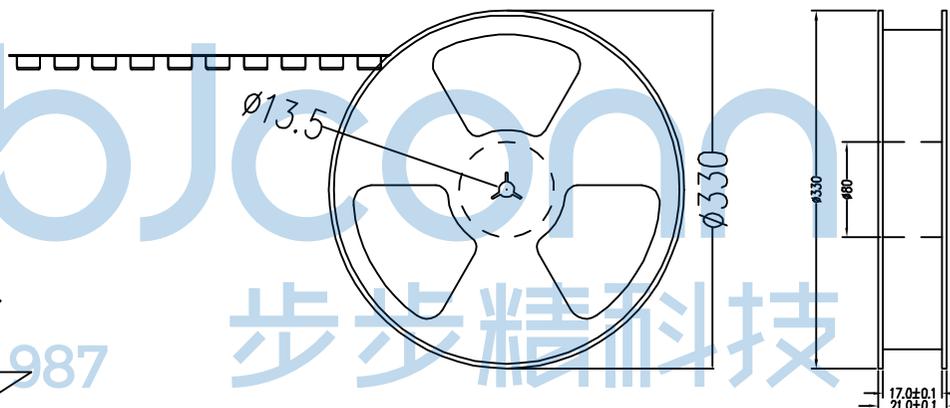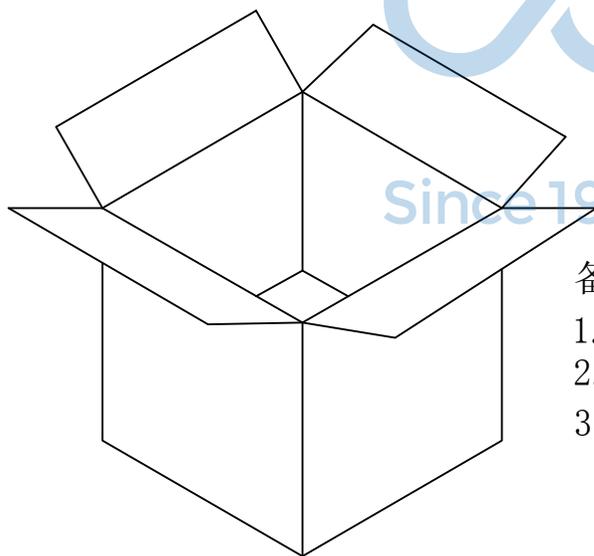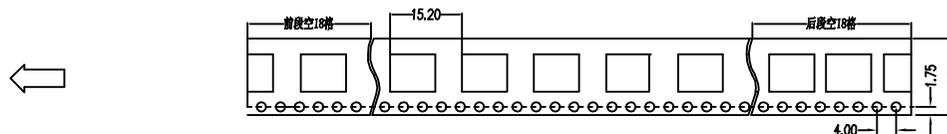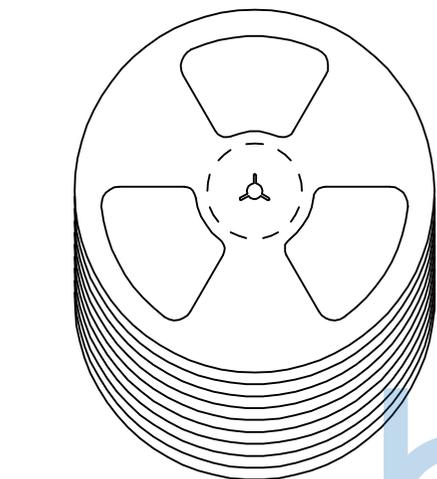

备注:

1. 包装数量: 400/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS),
上带: 聚乙烯 (PET),
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"	
APPD.	JM_Zheng	NAME: HDMI 19P 母座 四脚贴片 带柱1.0 柱高0.80 L=11.55 H=6.28 端子SMT 平口 铁壳	
CHKD.	LYX	PJ. NO.: 124-221-190001-T1G	
DR.	TSP	SIZE: A4 DRW NO.:	
PDWG.NO:	0006-1	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2