

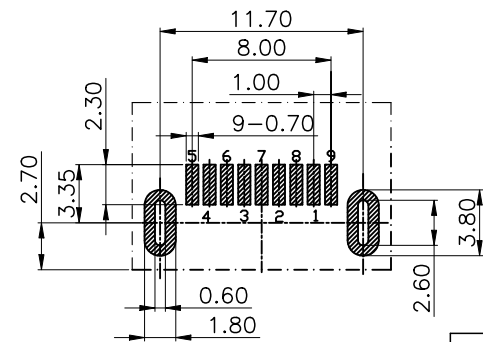



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

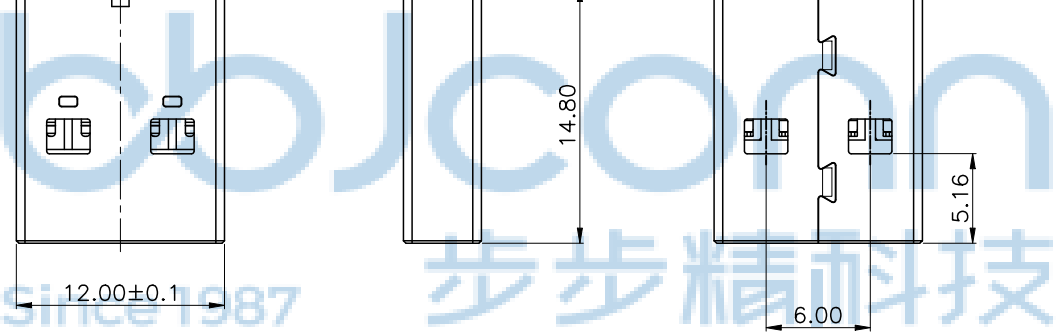

NOTE:  
 1.MATERIAL:  
 1.1 INSULATOR:LCP UL 94V-0  
 1.2 CONTACT:BRONZE(T=0.20mm)  
 1.3 SHELL:SPCC(T=0.30mm)  
 2.ELECTRICAL CHARACTERISTICS;  
 2.1 CONTACTRESISTANCE:30mΩ MAXIMUM  
 2.2 CONTACT CURRENT RATING:1.5AMPERES  
 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.  
 2.4 INSULATION RESISTANCE 1000 MEGOHMS MIN  
 2.5 OPERATING TEMPERATURE:-40°C ~ 85°C  
 3 MECHANICAL CHARACTERISTICS:  
 3.1 MATING FORCE:3.57kg MAX  
 3.2 UNMATING FORCE:1.02kg MIN  
 3.3 DURABILITY:MANDATORY:5,000 CYCLES

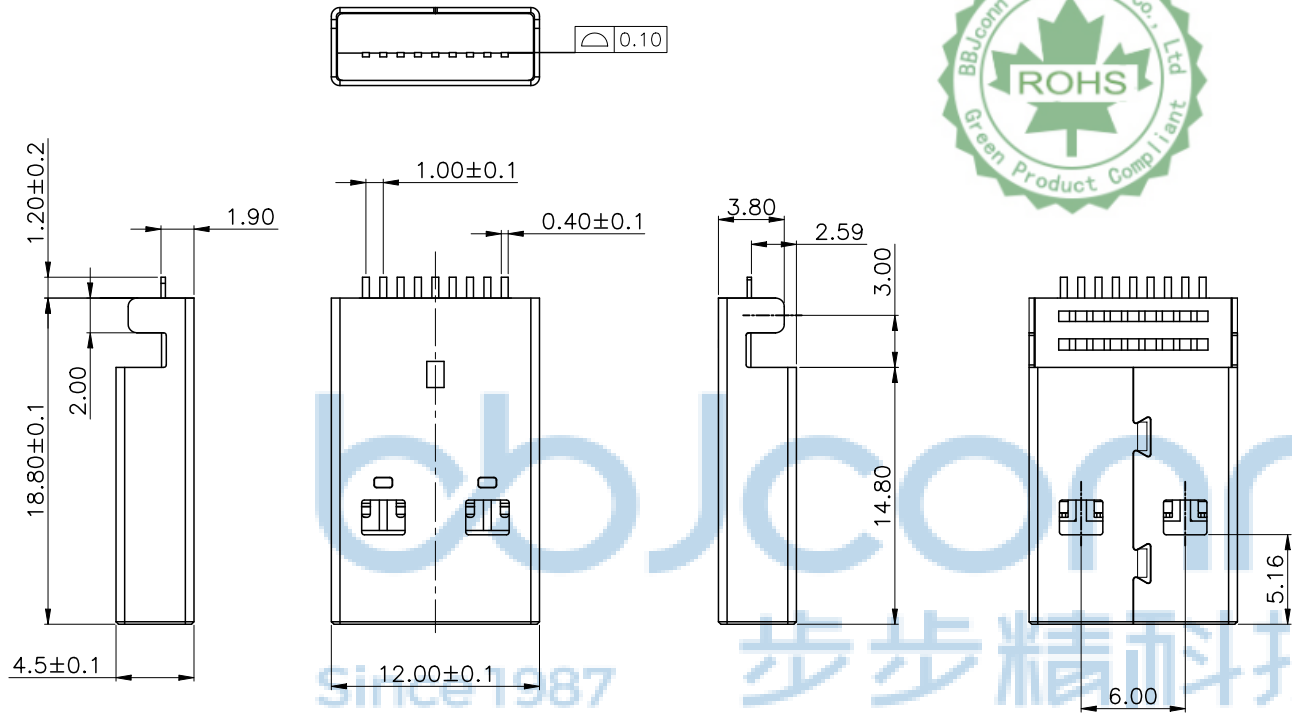

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

ITEM	DESCRIPTION	Q'TY	MAT'L	REMARK
1	INSULATION	1	HSG:LCP	UL94-V0
1		1	TML:C5191R-EH T=0.20	Ni50u",Sn80u"Au1~30u"
2	SHELL	1	SPCC T=0.30	Cu100U",Ni120U"


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.

PDWG NO: 0886-1

APPD: JM\_Zheng  
CHKD: LYX  
DR: SGF

NAME: USB 3.0 公头 90度 L=18.8 沉板2.59 直脚 端子SMT 无柱 LCP黑胶 铁壳 盒装PJ NO: 127-171-090003-K4G  
SIZE:A4 DRW NO:  
FINISH:SEE NOTES MAT'L:SEE NOTES  
SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

**深圳市步步精科技有限公司**

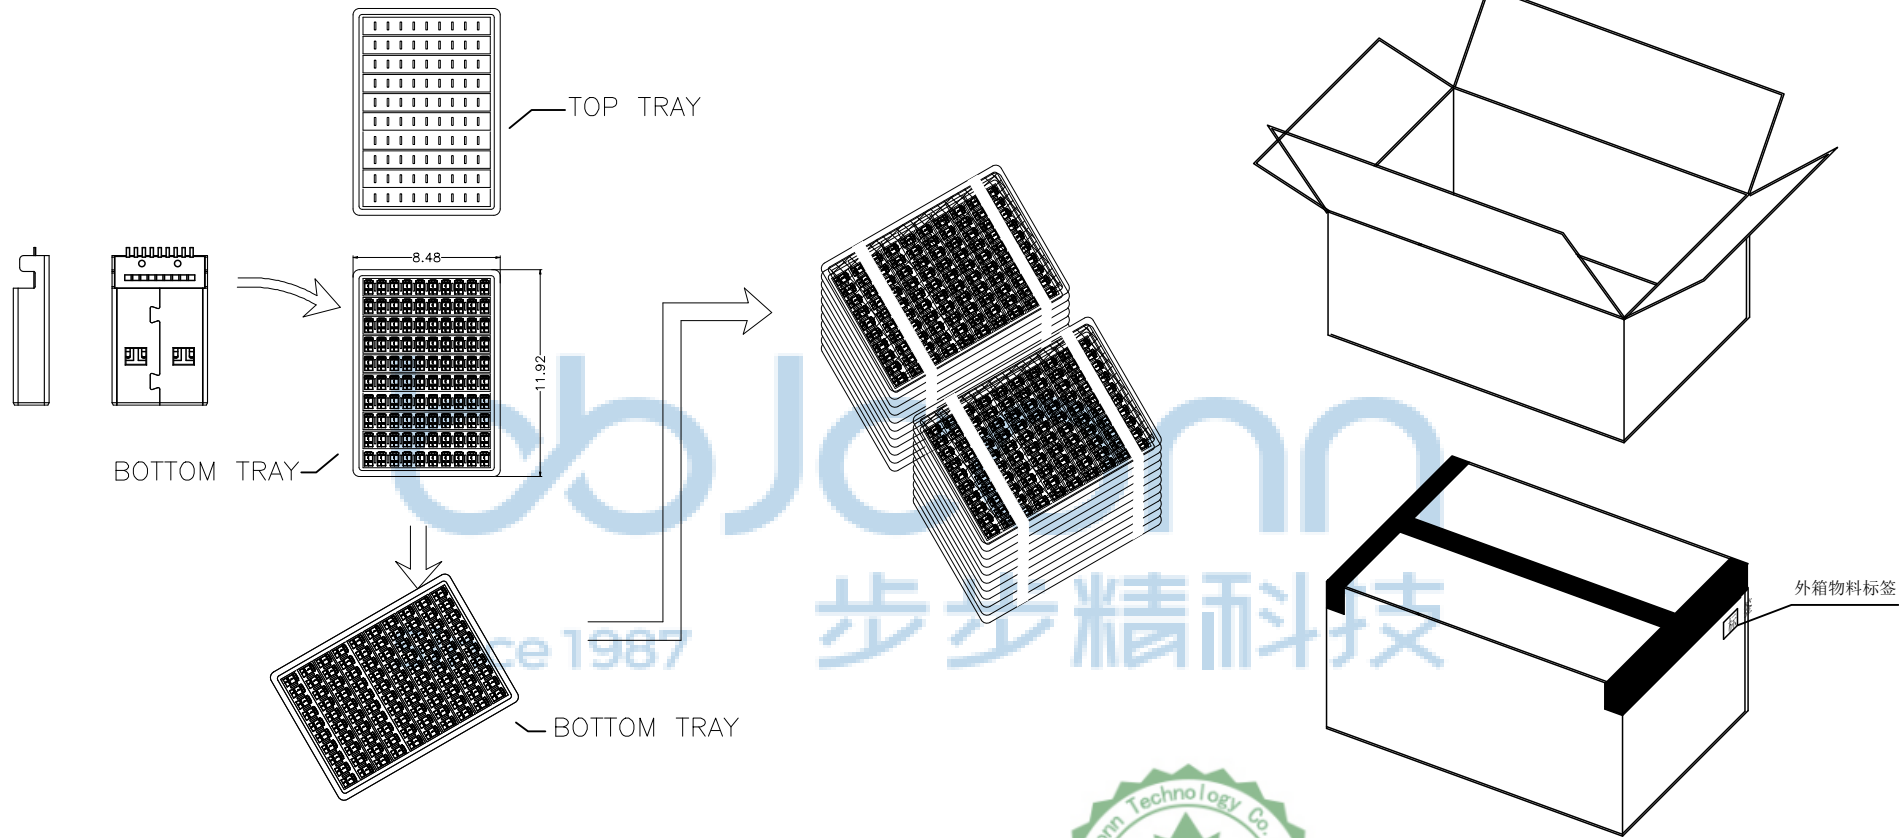

包装说明:

1. 将合格产品按方向放置在真空盒内, 每盘数量见表格.
2. 再将真空盒叠起, 然后用PE膜缠绕如图所示, 并贴上标签.
3. 将捆好的真空盒放入纸箱, 每箱数量见表格.
4. 外箱用透明胶带封“工”字型;
5. 依外箱图示位置粘贴好产品或其它标签.  
(若客户另有贴标签要求, 则按其定单注明之要求贴)
6. 如遇尾数产品不能装满整箱时, 在外箱底部填充纸带, 直至尾数产品能满足整箱包装, 在外箱标签上注明产品尾数数量.



包装方式	每盘数量 (PCS/盘)	盘数 (盘/箱)	每箱数量 (PCS/箱)	净重N.W (Kg/箱)	毛重G.W (Kg/箱)
盒装	100	50	5000	----	----
卷装	----	----	----	----	----

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
PRIOR WRITTEN PERMISSION.  
PDWG NO: 0886-1

**深圳市步步精科技有限公司**

.X: ±0.38 X': ±3'		NAME: USB 3.0 公头 90度 L=18.8 沉板2.59	
.XX: ±0.25 X'': ±2'		直脚 端子SMT 无柱 LCP黑胶 铁壳 盒装	
.XXX: ±0.13 .XX': ±1'		PJ NO: 127-171-090003-K4G	
APPD	JM_Zheng	SIZE:A4	DRW NO:
CHKD	LYX	FINISH:SEE NOTES MAT'L:SEE NOTES	
DR	SGF	SCALE:N/A	REV:A0 UNIT:mm PAGE:2/2